














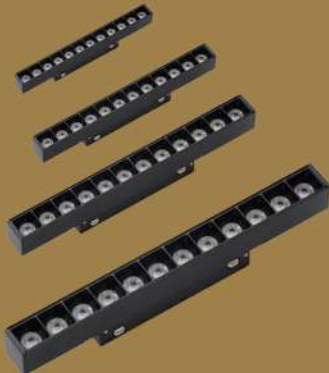



| CODE | PICTURE | STRUCTURE DATA | PERFORMANCE DATA | COLOR TEMPERATURE | PRICE (T) |
|-------------|---|--|--|-------------------|-----------|
| LB-2023-01 |  | Material: AL +ABS size: 115*23*43 mm IP rate: IP 20 | Waltage: 6W Lumen: 420 lm CRI: 80 Voltage: 48 V | 4200 K | |
| LB-2023-02 | | Material: AL +ABS size: 220*23*43 mm IP rate: IP 20 | Waltage: 12W Lumen: 840 lm CRI: 80 Voltage: 48 V | 4200 K | |
| LB-2023-03 | | Material: AL +ABS size: 330*23*43 mm IP rate: IP 20 | Waltage: 18W Lumen: 1260 lm CRI: 80 Voltage: 48 V | 4200 K | |
| LB-2023-04 | | Material: AL +ABS size: 440*23*43 mm IP rate: IP 20 | Waltage: 24W Lumen: 1680 lm CRI: 80 Voltage: 48 V | 4200 K | |
| LBB-2024-01 |  | Material: AL +ABS size: 224*23*43 mm IP rate: IP 20 | Waltage: 12W Lumen: 720 lm CRI: 80 Voltage: 48 V | 4200 K | |
| LBB-2024-02 |  | Material: AL +ABS size: 332*23*43 mm IP rate: IP 20 | Waltage: 18W Lumen: 1260 lm CRI: 80 Voltage: 48 V | 4200 K | |

| CODE | PICTURE | STRUCTURE DATA | PERFORMANCE DATA | COLOR TEMPERATURE | PRICE (T) |
|------------|---|---|--|-------------------|-----------|
| LB-2023-01 |  | Material: AL +ABS size: 300*23*43 mm IP rate: IP 20 | Waltage: 12W Lumen: 840 lm CRI: 80 Voltage: 48 V | 4200 K | |
| LB-2023-02 | | Material: AL +ABS size: 600*23*43 mm IP rate: IP 20 | Waltage: 24W Lumen: 1440 lm CRI: 80 Voltage: 48 V | 4200 K | |
| LB-2023-03 | | Material: AL +ABS size: 900*23*43 mm IP rate: IP 20 | Waltage: 36W Lumen: 2160 lm CRI: 80 Voltage: 48 V | 4200 K | |
| LB-2023-04 | | Material: AL +ABS size: 1200*23*43 mm IP rate: IP 20 | Waltage: 48W Lumen: 2880 lm CRI: 80 Voltage: 48 V | 4200 K | |
| LC-2024-01 |  | Material: AL +ABS size: 50*150 mm IP rate: IP 20 | Waltage: 6W Lumen: 360 lm CRI: 80 Voltage: 48 V | 4200 K | |
| LC-2024-02 | | Material: AL +ABS size: 50*300 mm IP rate: IP 20 | Waltage: 12W Lumen: 720 lm CRI: 80 Voltage: 48 V | 4200 K | |

| CODE | PICTURE | STRUCTURE DATA | PERFORMANCE DATA | COLOR TEMPERATURE | PRICE (T) |
|------------|---|---|--|----------------------------|-----------|
| SP-2023-01 |  | Material: AL +ABS size: 300*23*43 mm IP rate: IP 20 | Waltage: 12W Lumen: 720 lm CRI: 80 Voltage: 48 V | 4200 K 3000 K 6500 K | |
| SP-2023-02 | | Material: AL +ABS size: 600*23*43 mm IP rate: IP 20 | Waltage: 20W Lumen: 1400 lm CRI: 80 Voltage: 48 V | 4200 K 3000 K 6500 K | |
| SR-2023-01 |  | Material: AL SIZE: 1M | Tickness: 1.5 mm | — | |
| SR-2023-02 | | Material: AL SIZE: 2 M | Tickness: 1.5 mm | — | |
| SR-2023-03 | | Material: AL SIZE: 3 M | Tickness: 1.5 mm | — | |
| SL-2024-01 |  | Material: AL SIZE: 1M | Tickness: 1.5 mm | — | |
| SL-2024-02 | | Material: AL SIZE: 2 M | Tickness: 1.5 mm | — | |
| SL-2024-03 | | Material: AL SIZE: 3 M | Tickness: 1.5 mm | — | |

| CODE | PICTURE | STRUCTURE DATA | PERFORMANCE DATA | PRICE (T) |
|------------|---|---------------------------|--------------------------------------|-----------|
| SS-2023-01 |  | Material: AL SIZE: 1 M | Tickness: 1.5 mm | |
| SS-2023-02 | | Material: AL SIZE: 2 M | Tickness: 1.5 mm | |
| SS-2023-03 | | Material: AL SIZE: 3 M | Tickness: 1.5 mm | |
| TT-2023-01 |  | SIZE: 143*18*18 MM | — | |
| TT-2023-02 |  | SIZE: 320*18*18 MM | — | |
| TT-2023-03 |  | SIZE: 85*85*46 MM | — | |
| TT-2023-04 |  | SIZE: 85*85*46 MM | — | |
| TT-2023-05 |  | SIZE: 85*85*46 MM | — | |
| TT-2023-06 |  | SIZE: 85*85*46 MM | — | |
| TT-2023-07 |  | SIZE: 85*85*52 MM | — | |
| TT-2023-08 |  | SIZE: 85*85*70 MM | — | |
| RP-2023-01 |  | SIZE: 1 M | — | |
| TX-2023-01 |  | SIZE: 234*22*43 MM | WATTAGE: 100 W VOLTAGE: 100-265 V | |
| TX-2023-02 |  | SIZE: 304*22*43 MM | WATTAGE: 200 W VOLTAGE: 100-265 V | |